

Performance Analysis of Dynamic Source Routing Protocol for Ad Hoc Networks Based on Taguchi's Method

¹Muhammad Hisyam Lee, ²Mazalan Sarahintu

Faculty of Science, Universiti Teknologi Malaysia, 81310 Skudai, Johor, Malaysia
e-mail: ¹mhl@utm.my, ²m381_zal@yahoo.com

Abstract Mobile Ad Hoc Networks (MANET) are self-organizing, multi-hop wireless networks. The MANETs are rapidly deplorable due to the absence of a fixed infrastructure. A number of routing protocols have been proposed in solving routing problems for this type of network, to provide and maintain better connectivity in the network. Before being implemented in real life, the performance of a routing protocol is evaluated primarily through the simulation experiments. This paper presents Taguchi's method to optimize networks parameters of dynamic source routing protocol for such mentioned networks. Performance analysis of the drop rate are conducted based on three factors namely terrain size, pause time, and node velocity. An L4 orthogonal array was used to design the experiment. The study indicated that, among the factors considered, terrain was found to have strongest effects, followed by pause time. By taking into consideration factorial effects, the optimal levels were found to be A_1 , B_1 , and C_1 , corresponding to terrain size of $25 \times 25 \text{ m}^2$, pause time of 15 seconds, and node velocity of 0.72 m/s. Using these factor-levels combination, a minimum of 3.26% drop rate can be obtained.

Keywords Taguchi method; parameter optimization; performance evaluation; ad hoc network; dynamic source routing protocol.

1 Introduction

An ad hoc network is a special type of wireless mobile networks, in which a collection of mobile platforms such as PDAs, cell-phones, and laptops, which are also known as nodes, formed a temporary network without relying on any organized administration, such as base station [2]. This network is useful in disaster recovery situations and places with non-existing or damaged communication infrastructure, where a rapid deployment of a communication network is needed. An ad hoc network is also useful in conferences, where people in a conference can form a temporary network without engaging the services of pre-existing network, for example wireless LANs.

In this network, since some receiving nodes may be out of the direct transmission range of a sending node, intermediate nodes have to act as routers to forward packets to the receiving nodes. For this reason, some protocols are necessary to make the routing decisions. These include guidelines that allow nodes to discover and maintain routes to arbitrary destinations in the network [1], to enable continued communication among a group of nodes. Therefore,

the goal of the routing protocol is to dynamically establish and maintain routing in the network, forwarding packets for each other to allow communication between nodes not directly within wireless transmission range. Until now, there are no standard for the routing protocol for mobile ad hoc networks.

A number of routing protocols have been proposed in solving routing problems for mobile ad hoc networks [17], utilizing a variety of different algorithms and approaches, one of which is DSR, a reactive routing protocol. The main feature of this routing protocol is that routes are created when needed. (To know how the DSR operates please refer to [1, 2]). In order to know how well the DSR performs in a certain situation, for example where nodes are highly mobile, the performance of the routing protocol is measured primarily through simulation experiments (see [2, 4, 5, 12, 13, 16]). In these experiments, the performance of the DSR protocol is evaluated by looking at some performance metrics, for example routing overhead, where the lower the routing overhead, the better the DSR protocol in terms of consuming energy [16].

In practice, the performance of the DSR can be influenced by several factors, including terrain size, pause time, and node velocity [12]. Pause time and node velocity can cause link failures, which negatively impact routing and quality of service supports [14]. Terrain size has a considerable impact on the network scalability, that is the number of nodes in the network that can be scaled [15].

Considering the facts mentioned above leads to some questions: what is the most significant factor affecting certain performance metric of the DSR? What are the ranks of the factors? What is the best combination of factor levels (values) that reliable to provide a good response metrics for the DSR? The above mentioned questions may need to be answered due to some beneficial results. For example, suppose pause time (node mobility) is shown to have a greater impact on a performance metric of the DSR protocol than any factors. Therefore, if there is an attempt to obtain better performance of the DSR protocol with respect to the metric, something should be done with the node mobility, for example the current model utilizing pause time (i.e., random way point model) is improved or changed with another model. Another benefit, the combinations of factor-levels that would suggest here might be used as a reference of factor settings to evaluate performance of any routing protocol when considered a scenario taken from life (either small or moderate border sizes and density).

In particular, this work aims to estimate the impacts of network factors on the performance of the DSR with respect to a performance metric, namely drop rate. Taguchi method is presented to achieve the aim. The remainder of this paper is organized as follows. In section 2, we discuss the introduction to Taguchi method. In section 3, we discuss the experimental setup. In section 4, we present our analysis and discussions. Finally, in section 5, we conclude our results.

2 Methods

There are many ways to design an experiment, but the most frequently used approach is a full factorial experiment. However, for full factorial experiments, there are 2^k possible trials that must be conducted (k = the number of factors each at two levels). Therefore, it is very time consuming when many factors are considered [8].

In order to minimize the number of experimental trials required, fractional factorial

experiments (FFEs) were developed. FFEs use only a portion of the total possible combinations to estimate the effects of factors and the effects of some of the interactions. Taguchi Method provides a family of FFE matrices which could be used in various experiments (refer [7]). These matrices reduce the experimental number but still obtain reasonably rich information.

In Taguchi's methodology, all factors affecting the process quality can be divided into two types: control factors and noise factors [7, 8, 9]. Control factors are those set by the experimenter and are easily adjustable. These factors are most important in determining the quality of product characteristics. For this work, typical control factors include terrain size, pause time, and node velocity. Noise factors, on the other hand, are those undesired variables that are difficult, impossible, or expensive to control, such as the humidity and the ageing of machines.

The major steps of implementing the Taguchi approach are [7]: (1) to determine the objective of experiments, (2) to identify the response variables to be measured, (3) to identify the factors and interactions, (4) to identify the levels of each factor, (5) to select a suitable experiment matrix, (6) to assign the factors/interactions to columns of the experiment matrix, (7) to conduct the experiments, (8) to analyze the data and determine the optimal levels, and (9) to conduct the confirmation experiment.

Two level factors are considered as it is recommended by Taguchi for an initial experiment. Since only three factors are studied without interaction, an L4 matrix is chosen. The L4, two level matrix is shown in Table 1, where the numbers 1 and 2 stand for the levels of the factors. In data analysis, signal-to-noise (S/N) ratios are used to allow the control of the response as well as to reduce variability about the response. Analysis of variance (ANOVA) is carried out to analyze the relative significance of the individual factors involved.

Table 1: L4 Orthogonal Array

Experiment number	Column (Factor)			Response (y_i)
	1 (A)	2 (B)	3 (C)	
1	1	1	1	y_1
2	1	2	2	y_2
3	2	1	2	y_3
4	2	2	1	y_4

Experiments were performed with the Network Simulator [3]. The simulator was selected because of the range of features that it provides, and partly because it is an open source code that can be modified and extended. All simulations were performed on an Intel Pentium IV processor at 2.00 GHz, 256 MB of RAM running Linux Fedora Core 3. Each simulation scenario was executed for 300 seconds.

The impacts of the factors on the performance of the DSR protocol were examined by looking at drop rate. The desirable results are smaller drop rates, corresponding to higher number of data packets delivered from source to destination in the network. The following factors were considered in the experiment: terrain size, pause time, and node velocity.

Terrain is an area in which nodes move freely around and communicate with one another. The terrain is composed of two dimensions, length and width, which can be represented as

x meter and y meter. The terrain size is adjusted approximately to maintain the required network density [15]. Whereas pause time and node velocity are the most significant factors for the node movement. Both factors face the challenge to the DSR protocol on how to repair broken routes using low overhead [14]. The control factors with the chosen levels are listed in Table 2.

Table 2: Factors and Levels

Symbols	Factors	Level 1	Level 2
A	Terrain (m ²)	25 × 25	45 × 45
B	Node velocity (m/s)	0.72	1.34
C	Pause time (s)	15	50

The justification of the level choices that were made is as follows. The terrain size of 25 × 25 m² and 45 × 45 m² could be a place like a meeting room, lecture room, multipurpose room and so forth, where a group of people associated with their wireless devices such as PDAs, cell-phones, and laptops, all termed as hosts, communicate each other.

A pause time is a dormant time taken by a node before moving to another destination, measured in seconds. The pause time here can be when, a shopper acting as a host in a shopping complex, pauses frequently from one location to another to do something, for example window shopping, including surveying and examining the price and quality of items, goods, and clothes, before buying [12]; or when a student, performing as a host, who pauses for a moment at one destination, at his/her friends' location, to have a talk, discussion, and conversation, before moving to his/her original position or another destination in a classroom.

The speeds of 0.72 m/s and 1.34 m/s are the minimum and the maximum walking speeds of a pedestrian, respectively [11]. In real life, the differences can be explained by the trip purposes of hosts, and the places where they walk [10]. For example, a shopper in a shopping area tends to walk slower compared to a pedestrian in an airport terminal who is usually in a hurry.

The experimental data is shown in Table 3. Each experimental trial corresponds to a simulation scenario. Each simulation scenario was run with three replications ($r = 3$). The means of the three replications for each trial were then computed. The equation for means is

$$\bar{x} = \sum_{i=1}^n \frac{x_i}{n} \quad (1)$$

In addition to means, S/N ratios analysis was also used. Since a lower drop rate is desired, the smaller-the-better ratios formulation is chosen. The equation for calculating

this type of S/N ratios is

$$\text{S/N} = -10 \log \left[\frac{x_1^2 + x_2^2 + x_3^2 + \cdots + x_n^2}{n} \right] \quad (2)$$

$$= -10 \log (\text{MSD}) \quad (3)$$

$$= -10 \log \frac{1}{n} \sum_{i=1}^n x_i^2 \quad (4)$$

where n is the number of replications, and x_i the value of the metric for the i th replication for one trial. In Equation (4), the negative sign is applied to assure a S/N ratio increases for decreasing mean square deviation (MSD with target value $t_0 = 0$). Therefore, a lower mean square deviation which is equivalent to a higher S/N ratio is preferred. The measured results of the drop rate, means, and S/N ratios obtained using Equation (4) for each experimental trial are shown in Table 3.

Table 3: Experimental Layout and Data Collection

Trial number	Column number			Drop rate (%)			Average	S/N (dB)
	1	2	3					
	Factor							
	A	B	C					
1	25 × 25	15	0.72	2.83	3.09	3.85	3.26	−10.33
2	25 × 25	50	1.34	5.65	6.24	5.88	5.92	−15.46
3	45 × 45	15	1.34	64.65	63.97	61.96	63.53	−36.06
4	45 × 45	50	0.72	81.25	82.06	88.36	83.89	−38.48

Note: A: Terrain; B: Pause time; C: Node velocity

3 Results

The purpose of this analysis is to visualize the performance of the DSR over the simulation scenario. Upon inspection, the performance of the DSR changes as the factor levels change. Generally, this indicated that, varying the factor settings has influenced the output results (drop rate). As shown in Figure 1, the best condition (trial) that optimizes drop rate is the scenario 1 compared to the others. Obviously, it then increases linearly with the number of simulation scenario. Specifically, in the experiment 1, the terrain is smaller (level 1). This contributes to high connectivity in the networks, and therefore leads to better packets delivery. In addition to small terrain size, the mobility node is also considered so moderate that nodes are not often invalidating the existing routes maintained by the DSR protocol. Regarding this, maximum data packets can be transmitted.

In general, as the terrain size slightly increases, it is observed that drop rate is also increased. This is reasonable as when the terrain becomes wider, some nodes could be out of transmission range of other nodes. This makes the probability that nodes are disconnected from each other higher. Thus, the DSR protocol faces a challenge in searching for routes to destinations. Consequently, as connectivity cannot be continually established, drop rate becomes higher.

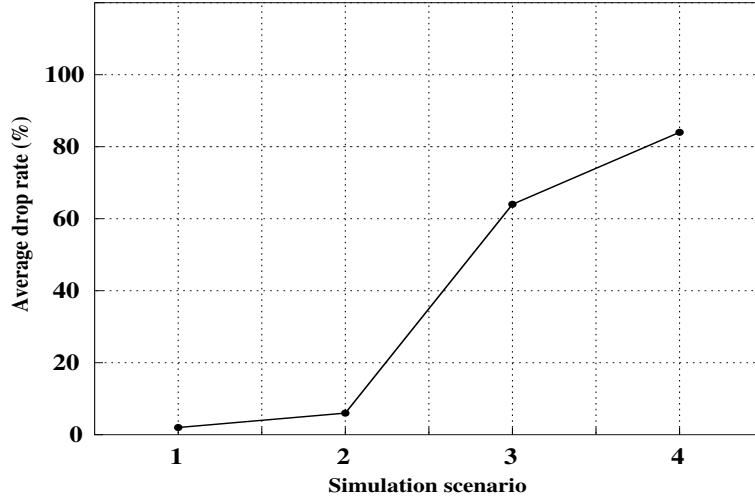


Figure 1: The Relative Effects of Factors

Using the experiment matrix, the effects factor was estimated. For clarity, procedure to estimate the effects of factors is illustrated. Let us consider an example of L4 matrix shown in Table 1. Let A_1 and A_2 be a total of a response value with factor A set at level 1 and level 2, respectively. The average values of a total response with factor A set at level 1 and level 2 are

$$\bar{A}_1 = \frac{y_1 + y_2}{2} \quad (5)$$

$$\bar{A}_2 = \frac{y_3 + y_4}{2} \quad (6)$$

Similarly, others can be defined using the following terms,

$$\bar{B}_1 = \frac{y_1 + y_3}{2} \quad (7)$$

$$\bar{B}_2 = \frac{y_2 + y_4}{2} \quad (8)$$

$$\bar{C}_1 = \frac{y_1 + y_4}{2} \quad (9)$$

$$\bar{C}_2 = \frac{y_2 + y_3}{2} \quad (10)$$

From Equation (5)-(10), the estimated effects of factor A, B, and C are

$$A(\text{effect}) = |\bar{A}_1 - \bar{A}_2| \quad (11)$$

$$B(\text{effect}) = |\bar{B}_1 - \bar{B}_2| \quad (12)$$

$$C(\text{effect}) = |\bar{C}_1 - \bar{C}_2| \quad (13)$$

Using the equations above, the effects of factors are estimated, from which the most influential factor, therefore, could be identified. Responses are in terms of S/N ratios, and the results are summarized in Table 4.

As shown in Table 4, the terrain is the most influential factor, affecting the drop rate of the DSR, followed by the pause time; and the node velocity has the least effect on the drop rate of the DSR. Graphically, these relative effects of factors can also be observed in the response graph shown in Figure 2. The factors can be ranked based on the relative comparisons of slopes between points plotted.

As higher S/N is preferred, the level of the factor with the highest S/N values is desired. Thus, according to Table 4 and Figure 2, the best combination factor levels are A_1 , B_1 , and C_1 . Their contributions are shown in Table 5.

If the predicted signal-to-noise ratios based on the selected levels of factors involved is defined as η , the predicted equation can be written as

$$\eta = \bar{A}_1 + \bar{B}_1 + \bar{C}_1 - T \quad (14)$$

where T is grand average of performance (refer Table 6). Since the optimum combination, that is A_1 , B_1 , and C_1 , happens to be the experiment number 1 that is already completed, confirmation test is not needed [9]. Therefore, using the Equation (14), the optimum performance is presented in Table 6, which is similar to that obtained in the experiment 1 (refer Table 3). An estimated result in the original units is 3.26%, in average.

Table 4: S/N Response Table for Factorial Effects

Factors	Column	Level 1 (L_1)	Level 2 (L_2)	Effect factor ($ L_1 - L_2 $)
Terrain (A)	1	-12.895	-37.270	24.375
Pause time (B)	2	-23.195	-26.970	3.775
Node velocity (C)	3	-24.405	-25.760	1.355

Table 5: Factor Contribution

Factors	Level description	Level	Contribution
Terrain size	$25 \times 25 \text{ m}^2$	1	12.1875
Pause time	15 s	1	1.8875
Node velocity	0.72 m/s	1	0.6775

Analysis of variance (ANOVA) was conducted to determine the relative influence of the individual factors and interactions to the total variation of the results. The interactions among the factors were not considered here. The strategy known as pooling was used [9], where factors having lower effects are combined with the error term to provide better estimate of error variance.

The last column of the ANOVA table, shown in Table 7, indicated the percent influence of the individual factor. According to the column, after being pooled, the terrain size has the most influence, 97.066%. The percent influence of the pause time is 2.033%. Since the node

Table 6: Optimum Condition

Contribution from all factors (total)	14.7525
Grand average of performance	-25.0825
Optimum performance	-10.33
Estimated result in the original units (%)	3.26

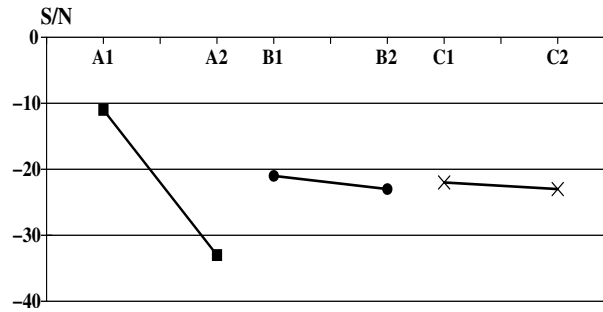


Figure 2: Response Graph for Factorial Effects

Table 7: ANOVA Table of S/N Ratios

Sources	Column	f	SS	V	F	PSS	P(%)
Terrain	1	1	594.161	594.161	324.269*	592.329	97.066
Pause time	2	1	14.239	14.239	7.771*	12.407	2.033
Node velocity	3	1	1.832	-	-	-	-
Error term	1	1	1.832	1.832			0.901
Total	3	3	610.233				100.000

Note: f: Degrees of freedom; SS: Sum of squares; V: Means squares (Variance);

F: *F*-ratio; PSS: Pure sum of squares; P: Percent influence

*At 100% confidence

velocity is considered to be insignificant, the effect of this factor is pooled. The influence of the error term is 0.901%. This small influence of the error term is due to the three sources [8]: experimental error, factors not included in the experiment, and uncontrollable factors. The 0.901% error means that 99.099% (100-0.901) of the influence on the variation of results comes from the two significant factors, which are the terrain size and the pause time.

4 Discussions

The drop rate of the DSR is dependent on the number of packets dropped, which is derived from packet delivery ratio (PDR). The PDR, one of the useful metrics to evaluate any ad hoc routing protocols, is defined as the number of packets delivered to destination (D) divided by the number of packets transmitted by source (T) [5].

$$\text{Packet delivery ratio (PDR)} = \frac{D}{T} \quad (15)$$

Then, the number of packets dropped is defined as the number of packets transmitted by source minus the number of packets delivered to destination.

$$\text{Number of packets dropped} = T - D \quad (16)$$

Eventually, the drop rate of the DSR is $\text{Drop rate} = \frac{T-D}{D} \times 100\%$.

Terrain plays a very important role in determining the performance of the DSR protocol with respect to drop rate. Given larger terrain, nodes could be out of a transmission range of one another, and therefore nodes get partitioned [2]. This could lead to high drop packets. Also, given high mobility, nodes are quickly mobile. This makes a weakened connectivity in the network, as routes are frequently broken. Since pause time corresponds to node mobility, there is, statistically, a reason that an interaction might exist between terrain size and pause time in contributing to the drop rate of the DSR [9].

Also, terrain along with network size and transmission range of nodes determines the node density. Network size and transmission range of nodes can also influence the DSR performance. However, in this work, we decided to fix the size and range as 10 nodes and 10 meter, respectively. If N is the number of nodes, r the node's transmission range, and x and y the width and length of terrain, the network density T is [13]

$$T = \frac{Nr^2\pi}{xy} \quad (17)$$

High network density contributes to high connectivity in the network. This is because increasing node density leads to better connectivity. Consequently, this directly results in lower drop rate.

Node velocity decides how quickly or slowly the node's position change, which in turn determines how quickly the network topology changes in the network. Thus, it directly affects how often the existing routes are broken or new routes are established.

As a result, node velocity certainly has an impact on the DSR protocol's ability to deliver data packets and maintaining stable routes. The higher the node velocity is, the quicker the routes break.

The performance of the DSR suffers a bit from high mobility [5]. With high mobility, the possibility of link failures is high, or link failures happen very frequently. It means the DSR protocol may not be able to keep up with the job of establishing routes. To have lower drop rate, high motion should be avoided. In the DSR protocol experiments, besides node velocity, pause time is also a source of node movement. If d and v are defined as drop rate and node velocity, respectively, their relationship is

$$d \propto v \quad (18)$$

Drop rate is directly proportional to node velocity. It means that to obtain lower drop rate, node velocity should be low. If p is defined as pause time, its relationship to drop rate is

$$d \propto \frac{1}{p} \quad (19)$$

Here, drop rate is inversely proportional to pause time. It means that, in contrast to node velocity, to get lower drop rate, pause time should be high. Hence, the following relationship is obtained.

$$d \propto \frac{v}{p} \quad (20)$$

Therefore, theoretically, the higher the pause time, and the smaller the node velocity, the smaller the drop rate of the DSR protocol should be.

5 Conclusion

The optimal drop rate for the dynamic source routing protocol was found by using the Taguchi Method. An L4 orthogonal array was used to design the experiments. The results revealed that terrain, pause time, and node velocity can significantly affect the drop rate of the DSR protocol. Among the factors considered, terrain was found to have strong effects, followed by pause time. By taking into consideration of factorial effects, the optimal levels were chosen to be the terrain size of $25 \times 25 \text{ m}^2$, pause time of 15 seconds, and node velocity of 0.72 m/s. Using these factor-levels combination, a minimum of 3.26% drop rate could be obtained. Further studies will investigate the interaction effects between terrain size and pause time.

Acknowledgements

This work was supported by Universiti Teknologi Malaysia (UTM) under Grant Vote No. 79220 and by Ministry of Science, Technology and Innovation (MOSTI), Malaysia, under Grant 01-01-06-SF0234.

References

- [1] D.B. Johnson, *Routing in Ad Hoc Networks of Mobile Host*, Proceedings of the IEEE Workshop on Mobile Computing Systems and Applications, December 1994, Santa Cruz, CA: IEEE, 158-163.

- [2] D.B. Johnson & D.A. Maltz, *Dynamic Source Routing in Ad Hoc Wireless Networks*, in: T. Imelinski & H. Korth, eds. Mobile Computing, Kluwer Academic Publisher, Norwell, Mass., 1998, 151–181.
- [3] K. Fall & K. Varadhan, *ns Notes and Documentation*, US Berkeley and Xerox PARC, 1999, **URL:** <http://www.isi.edu/nsnam/ns/>
- [4] A. Boukerche, *Performance Evaluation of Routing Protocols for Ad Hoc Wireless Networks*, Mobile Networks and Applications, 9(5)(2004), 333–342.
- [5] S.R. Das, C.E. Perkins & E.M. Royer, *Performance comparison of Two On-Demand Routing Protocols for Ad Hoc Networks*, Proceedings of the IEEE Conference on Computer Communications (INFOCOM), March 2000, Tel Aviv, Israel: IEEE, 3–12.
- [6] A. Nasipuri, R. Castaneda & S.M. Das, *Performance of multipath routing for on-demand protocols in ad hoc networks*, Kluwer Mobile Networks and Application (MONET) Journal, 6(4)(2001), 339–349.
- [7] G.S. Peace, *Taguchi Methods: a Hands-on Approach*, Addison-Wesley Publishing Company, Reading, Mass., 1993.
- [8] Ranjit K. Roy, *Design of Experiment Using The Taguchi Approach : 16 step to product and process improvement*, John Wiley & Sons, Inc., Toronto, Canada, 2001.
- [9] Ranjit K. Roy, *A primer on the Taguchi Method*, Van Nostrand Reinhold, New York, N.Y., 1990.
- [10] W. H. K. Lam & Chung-yu Cheung, *Pedestrian speed/flow relationships for walking facilities in Hong Kong*, Transportation Engineering, 126(4)(2000), 343–349.
- [11] S.B. Young, *Evaluation of pedestrian walking speeds in airport terminals*, Transportation Research Record No. 1674(1999), 20–26.
- [12] M. Sarahintu & M.H Lee, *Performance Evaluation on Mobile Ad Hoc Networks with Dynamic Source Routing Protocol*, Prosiding Simposium Kebangsaan Sains Matematik Ke-14, 06–08 Jun 2006, Kuala Lumpur: PERSAMA and UM, 517–523.
- [13] R.V. Boppana & A. Mathur, *Analysis of the Dynamic Source Routing Protocol for Ad Hoc Networks*, IEEE Workshop on Next Generation Wireless Networks (WoNGeN), December 18–21, Goa, India, 2005.
- [14] D.D. Perkins, H.D. Hughes & C.B. Owen, *Factors affecting the performance of ad hoc networks*, Proceedings of the IEEE International Conference on Communications (ICC 2002), 28 April–02 May 2002, New York City, USA: IEEE, vol.4, 2048–2052.
- [15] M.W. Totaro & D.D. Perkins, *Using statistical design of experiments for analyzing mobile ad hoc networks*, Proceedings of the 8th ACM international symposium on Modeling, analysis and simulation of wireless and mobile systems, October 10–13, Montreal, Quebec: ACM, 2005, 159–168.
- [16] D.A. Maltz, J. Broch, J. Jetcheva & D.B. Johnson, *The Effects of On-Demand Behavior in Routing Protocols for Multi-Hop Wireless Ad Hoc Networks*, IEEE Journal on Selected Areas of Communications, 17(8)(1999), 1439–1453.
- [17] E.M. Royer & C.K. Toh, *A Review of Current Routing Protocols for Ad Hoc Mobile Wireless Networks*, IEEE Personal Communications, 7(4)(1999), 46–45.